

DATA SHEET

BGD502; BGD504 CATV power doubler amplifier modules

Product specification
Supersedes data of February 1994
File under Discrete Semiconductors, SC16

1995 Oct 25

CATV power doubler amplifier modules

BGD502; BGD504

FEATURES


- Excellent linearity
- Extremely low noise
- Silicon nitride passivation
- Rugged construction
- TiPtAu metallized crystals ensure optimal reliability.

DESCRIPTION

Hybrid amplifier modules for CATV systems operating over a frequency range of 40 to 550 MHz at a voltage supply of 24 V (DC).

PINNING - SOT115C

PIN	DESCRIPTION
1	input
2	common
3	common
5	+V _B
7	common
8	common
9	output

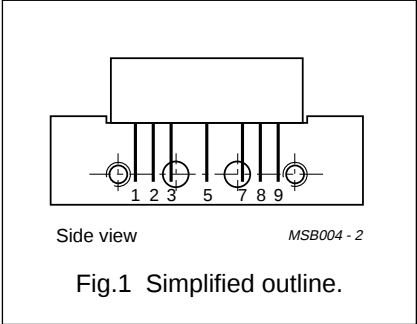

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
G _p	power gain	f = 50 MHz			
	BGD502		18	19	dB
	BGD504		19.5	20.5	dB
	power gain	f = 550 MHz			
	BGD502		18.8	20.8	dB
	BGD504		20.2	22.2	dB
I _{tot}	total current consumption (DC)	V _B = 24 V	—	435	mA

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V _i	RF input voltage	—	60	dBmV
T _{stg}	storage temperature	−40	+100	°C
T _{mb}	operating mounting base temperature	−20	+100	°C

CATV power doubler amplifier modules

BGD502; BGD504

CHARACTERISTICS

Bandwidth 40 to 550 MHz; $V_B = 24$ V; $T_{mb} = 35$ °C; $Z_S = Z_L = 75 \Omega$.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G_p	power gain	$f = 50$ MHz				
	BGD502		18	–	19	dB
	BGD504		19.5	–	20.5	dB
	power gain	$f = 550$ MHz				
	BGD502		18.8	–	20.8	dB
	BGD504		20.2	–	22.2	dB
SL	slope cable equivalent	$f = 40$ to 550 MHz	0.2	–	2.2	dB
FL	flatness of frequency response	$f = 40$ to 550 MHz	–	–	± 0.3	dB
S_{11}	input return losses	$f = 40$ to 80 MHz	20	–	–	dB
		$f = 80$ to 160 MHz	19	–	–	dB
		$f = 160$ to 550 MHz	18	–	–	dB
S_{22}	output return losses	$f = 40$ to 80 MHz	20	–	–	dB
		$f = 80$ to 160 MHz	19	–	–	dB
		$f = 160$ to 550 MHz	18	–	–	dB
S_{21}	phase response	$f = 50$ MHz	+135	–	+225	deg
CTB	composite triple beat BGD502 BGD504	77 channels flat; $V_o = 44$ dBmV; measured at 547.25 MHz	–	–	–65	dB
			–	–	–64	dB
X_{mod}	cross modulation BGD502 BGD504	77 channels flat; $V_o = 44$ dBmV; measured at 55.25 MHz	–	–	–68	dB
			–	–	–67	dB
CSO	composite second order distortion BGD502 BGD504	77 channels flat; $V_o = 44$ dBmV; measured at 548.5 MHz	–	–	–62	dB
			–	–	–60	dB
d_2	second order distortion BGD502 BGD504	note 1	–	–	–72	dB
			–	–	–70	dB
V_o	output voltage BGD502 BGD504	$d_{im} = -60$ dB; note 2	64	–	–	dBmV
			63.5	–	–	dBmV
F	noise figure	$f = 550$ MHz	–	–	8	dB
I_{tot}	total current consumption (DC)	note 3	–	415	435	mA

Notes

- $f_p = 55.25$ MHz; $V_p = 44$ dBmV; $f_q = 493.25$ MHz; $V_q = 44$ dBmV; measured at $f_p + f_q = 548.5$ MHz.
- Measured according to DIN45004B: $f_p = 540.25$ MHz; $V_p = V_o$; $f_q = 547.25$ MHz; $V_q = V_o - 6$ dB; $f_r = 549.25$ MHz; $V_r = V_o - 6$ dB; measured at $f_p + f_q - f_r = 538.25$ MHz.
- The modules normally operate at $V_B = 24$ V, but are able to withstand supply transients up to 30 V.

CATV power doubler amplifier modules

BGD502; BGD504

CHARACTERISTICS

Bandwidth 40 to 450 MHz; $V_B = 24$ V; $T_{mb} = 35$ °C; $Z_S = Z_L = 75$ Ω .

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
G_p	power gain	$f = 50$ MHz				
	BGD502		18	–	19	dB
	BGD504		19.5	–	20.5	dB
	power gain	$f = 450$ MHz				
	BGD502		18.6	–	20.6	dB
	BGD504		20	–	22	dB
SL	slope cable equivalent	$f = 40$ to 450 MHz				
	BGD502		0.2	–	1.8	dB
	BGD504		0	–	1.65	dB
FL	flatness of frequency response	$f = 40$ to 450 MHz	–	–	± 0.3	dB
S_{11}	input return losses	$f = 40$ to 80 MHz	20	–	–	dB
		$f = 80$ to 160 MHz	19	–	–	dB
		$f = 160$ to 450 MHz	18	–	–	dB
S_{22}	output return losses	$f = 40$ to 80 MHz	20	–	–	dB
		$f = 80$ to 160 MHz	19	–	–	dB
		$f = 160$ to 450 MHz	18	–	–	dB
S_{21}	phase response	$f = 50$ MHz	+135	–	+225	deg
CTB	composite triple beat	60 channels flat;				
	BGD502	$V_o = 46$ dBmV;	–	–	–67	dB
	BGD504	measured at 445.25 MHz	–	–	–66	dB
CSO	composite second order distortion	60 channels flat;				
	BGD502	$V_o = 46$ dBmV;	–	–	t.b.f.	dB
	BGD504	measured at 548.5 MHz	–	–	t.b.f.	dB
X_{mod}	cross modulation	60 channels flat;				
	BGD502	$V_o = 46$ dBmV;	–	–	–67	dB
	BGD504	measured at 55.25 MHz	–	–	–66	dB
d_2	second order distortion	note 1				
	BGD502		–	–	–75	dB
	BGD504		–	–	–73	dB
V_o	output voltage	$d_{im} = -60$ dB; note 2				
	BGD502		67	–	–	dBmV
	BGD504		66.5	–	–	dBmV
F	noise figure	$f = 450$ MHz	–	–	7	dB
I_{tot}	total current consumption (DC)	note 3	–	415	435	mA

Notes

- $f_p = 55.25$ MHz; $V_p = 46$ dBmV; $f_q = 391.25$ MHz; $V_q = 46$ dBmV; measured at $f_p + f_q = 446.5$ MHz.
- Measured according to DIN45004B: $f_p = 440.25$ MHz; $V_p = V_o$; $f_q = 447.25$ MHz; $V_q = V_o - 6$ dB; $f_r = 449.25$ MHz; $V_r = V_o - 6$ dB; measured at $f_p + f_q - f_r = 438.25$ MHz.
- The modules normally operate at $V_B = 24$ V, but are able to withstand supply transients up to 30 V.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.