

Plug-In

Frequency Mixer

Level 17 (LO Power +17 dBm) 2 to 1500 MHz

SIMA-5H



CASE STYLE: A06
PRICE: \$37.20 ea. QTY (1-9)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA

Pin Connections

LO	8
RF	1
IF	3
GROUND	2,5,6,7
CASE GROUND	2,5,6,7
DO NOT USE	4

Features

- low conversion loss, 6.94 dB typ.
- wideband, 2 to 1500 MHz
- high L-R isolation, 44 dB typ., L-I isolation, 30 dB typ.
- hermetically metal case

Applications

- cellular/GPS
- satellite communications
- military, hi-rel applications

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
LO/RF	IF	Mid-Band		Total		L	M	U	L	M	U	L	M	U	L	M	U
f_L - f_U		$\bar{X}$	σ	Max.	Range Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
2-1500	DC-1000	6.94	0.07	8.5	8.5	65	35	44	23	40	22	54	25	30	23	25	13

1 dB COMP.: +10 dBm typ.

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]


U = upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
2.00	32.00	7.20	78.18	71.38	1.30	2.25
4.00	34.00	6.92	76.93	70.73	1.22	2.21
5.00	35.00	6.86	75.95	70.75	1.19	2.27
10.00	40.00	6.73	72.17	69.37	1.18	2.21
20.00	50.00	6.72	67.37	67.87	1.17	2.22
50.00	80.00	6.71	59.93	62.42	1.15	2.18
100.00	70.00	6.75	54.27	56.40	1.13	2.17
162.50	132.50	6.81	50.46	52.07	1.08	2.12
200.00	170.00	6.94	48.77	50.41	1.10	2.03
376.50	346.50	7.07	43.97	43.09	1.17	2.09
500.00	470.00	7.32	42.46	39.34	1.28	1.92
590.50	560.50	7.84	41.96	38.16	1.46	1.97
750.00	720.00	7.10	38.19	34.48	1.47	2.05
804.50	774.50	6.83	37.85	33.39	1.59	2.01
1000.00	970.00	6.80	36.59	29.05	1.73	1.91
1018.50	988.50	6.78	36.20	28.58	1.75	1.91
1232.50	1202.50	6.95	33.05	26.99	1.95	1.80
1393.00	1363.00	7.26	31.84	27.40	2.05	1.70
1446.50	1416.50	7.26	31.02	27.35	2.09	1.58
1500.00	1470.00	7.31	30.42	27.05	2.12	1.52


Outline Drawing

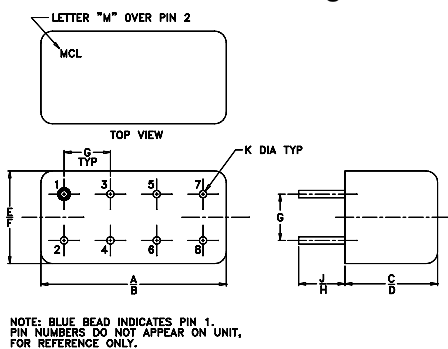

Outline Dimensions (inch/mm)

A	B	C	D	E	F
.770	.800	.285	.310	.370	.400
19.56	20.32	7.24	7.87	9.40	10.16
G	H	J	K	wt	
.200	.20	.14	.031	grams	
5.08	5.08	3.56	0.79	5.2	

Electrical Schematic

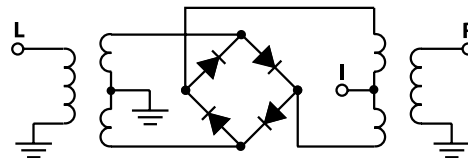

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



REV. OR
M98106
SIMA-5H
DJ/TD/CP
060712
Page 1 of 2

